MFF-CBYW8

Installation

CHAMBERY

Two Handle Widespread Lavatory Faucet

TOOLS YOU WILL NEED

Adjustable Wrench
Pliers
Pipe Wrench
Screwdriver
Teflon Tape

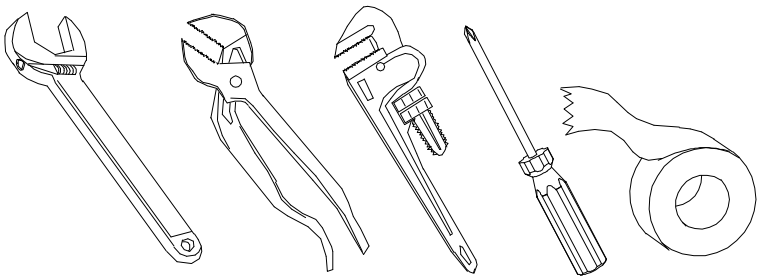

SAFETY TIPS

If you use soldering for the installation of the faucet, the seats, cartridges and washers will have to be removed before using flame. Otherwise, warranty will be void on those parts.

Cover your drain to avoid losing parts.

MAINTENANCE TIPS

Your new lavatory faucet is designed for years of trouble free performance.

Keep it looking new by cleaning it periodically with soft cloth. Avoid abrasive cleaners, steel wool and harsh chemicals as these will dull the finish and void your warranty.

MFF-CBYW8

INSTALLATION

1

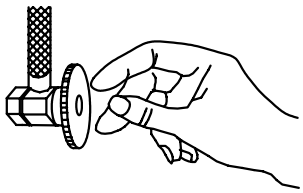

Shut off water supplies. Remove old faucet. Clean sink surface in preparation for new faucet.

2

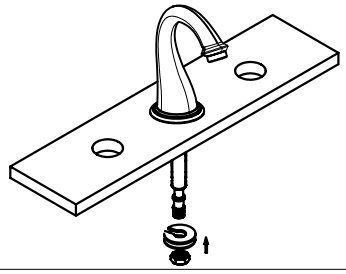

Place the spout into center hole of sink. From under sink, secure firmly to sink with rubber washer, metal washer and nut.

3

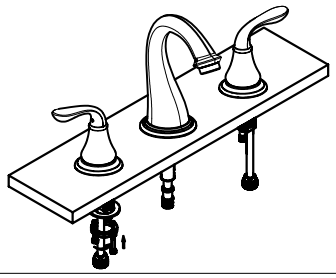

Insert the body with the hot supply label on the left (hot) side. Hold the body into proper position. Assemble metal washer and mounting nut onto body underneath sink. Tighten with the locking screw.

4

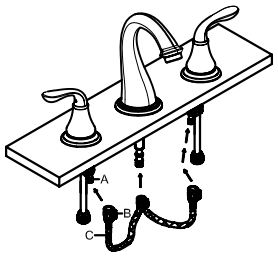

Press on the tabs (B) and push quick connects (C) firmly upward and snap onto shank (A). You will hear a click sound. Pull down moderately to ensure each connection has been made. If it is necessary to remove the hose, press on the tabs (B) and pull quick connects (C) down.

5

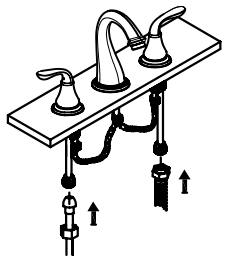

Connect 1/2 in. IPS connector or coupling nuts (not included) with 3/8 in. O.D. ball-nose riser (not included). NOTE: Refer to local plumbing codes for permissible types of water supply connectors.

6

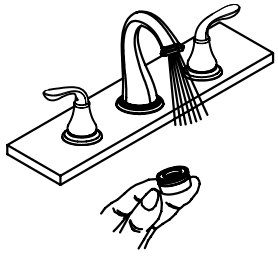

Remove AERATOR and turn faucet handles all the way on. Turn on hot and cold water supplies and flush water lines for one minute. Check all connections for leaks. Reinstall AERATOR. Your new faucet is now ready to use.

TROUBLESHOOTING

If you've followed the instructions carefully and your faucet still does not work properly, take these corrective steps:

Problem	Cause	Action
Leaks underneath handle.	Retainer nut has come loose. O-ring is dirty or damaged.	Tighten the retainer nut. Clean or replace O-ring.
Aerator leaks or has an inconsistent water flow pattern.	Aerator is dirty or misfitted.	Unscrew aerator, remove any debris, check seating of rubber seal then re-assemble aerator.

MFF-CBYW8

REPLACEMENT PARTS

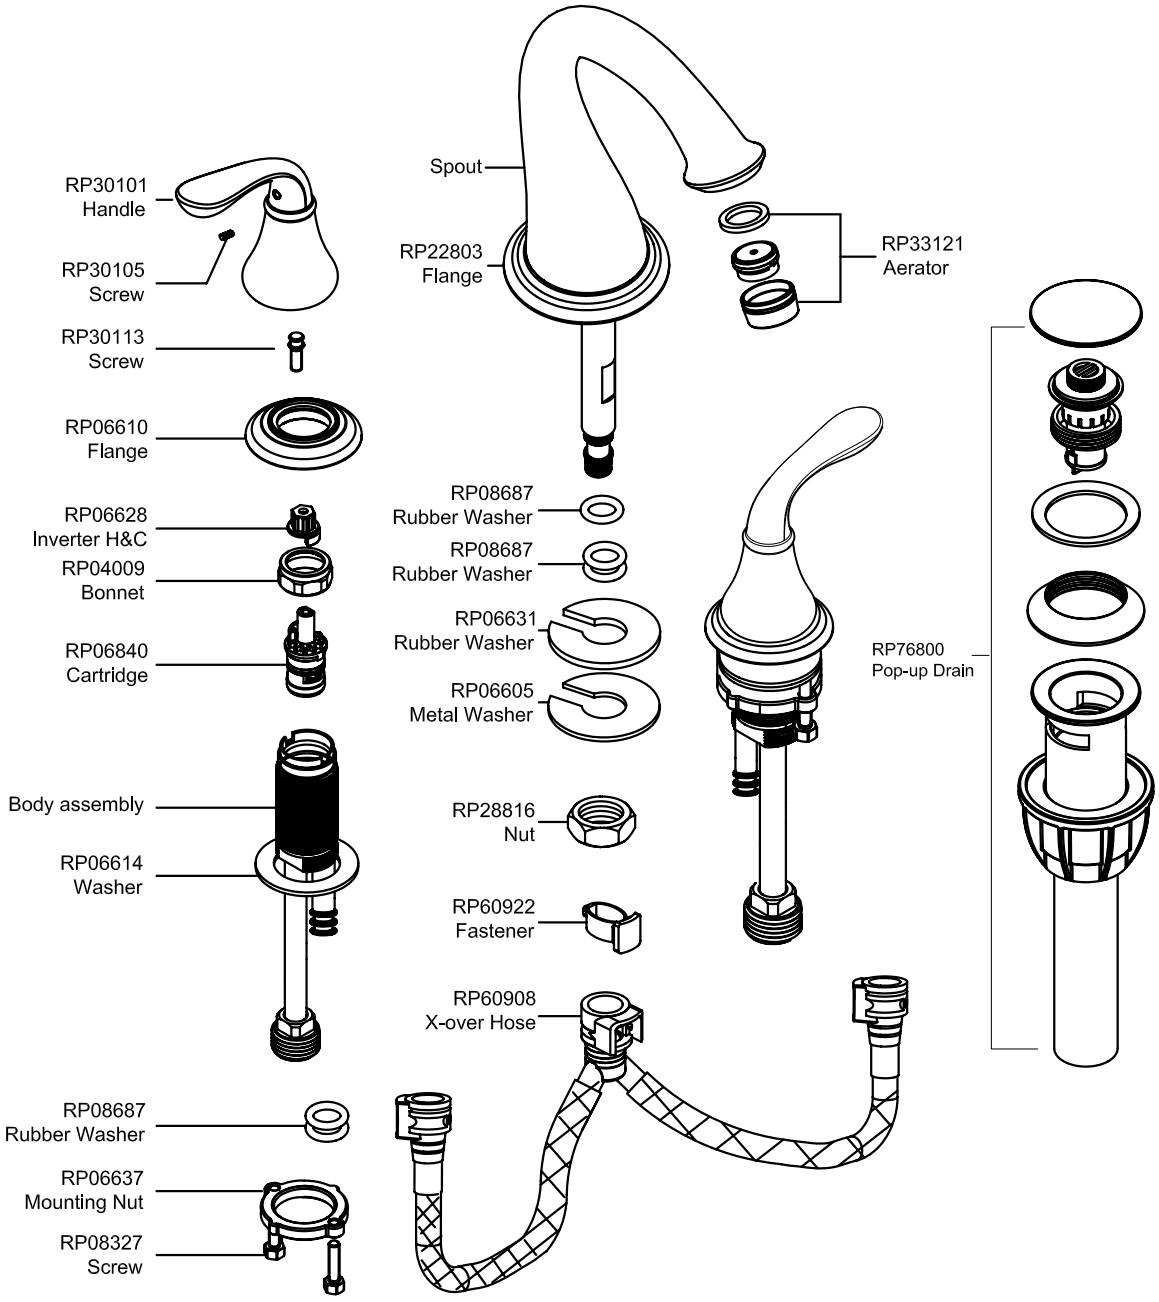

LIMITED LIFETIME WARRANTY

Italia Faucets, Inc. warrants to the original purchaser that its products will be free from defects in workmanship and materials. All Italia Faucets are provided with a limited lifetime warranty. This warranty does not cover any other labor or service charges associated with the removal, repair, or reinstallation of Italia Faucets products. This express warranty does not apply to products that have been damaged as a result of misuse, abuse, negligence, accident, faulty installation or maintenance practices and/or used in any manner contrary to those recommended by the manufacturer.

Need help? Please call our toll-free customer service line at 1-877-482-5422 for additional assistance or service.

MFF-CBYW8

POP-UP DRAIN INSTALLATION

1

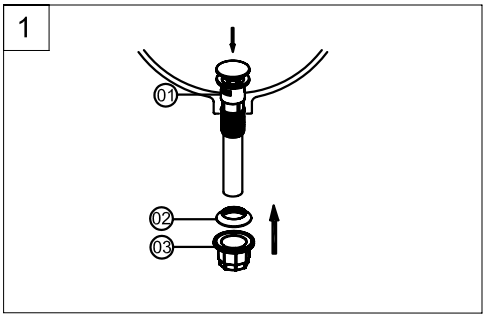

Slide pop-up assembly and rubber washer (01) down through drain hole on the vessel or basin. From underside, slide rubber gasket (02) against the bottom of the vessel or basin. Thread on nut (03) and tighten to gasket. Do not overtighten.